

TAKE-OFF DATA - C182

TAKE-OFF DISTANCE WITH 20° FLAPS FROM HARD SURFACE RUNWAY.

GROSS WEIGHT LBS.	IAS @ 50' MPH	HEAD WIND MPH	AT SEA LEVEL & 59°F.		AT 2500 FT. & 50°F.		AT 5000 FT. & 41°F.		AT 7500 FT. & 32° F.	
			GROUND RUN	TOTAL TO CLEAR 50' OBS	GROUND RUN	TOTAL TO CLEAR 50' OBS	GROUND RUN	TOTAL TO CLEAR 50' OBS	GROUND RUN	TOTAL TO CLEAR 50' OBS
2800	61	0	625	1205	745	1420	895	1695	1095	2090
		15	380	830	460	990	565	1200	700	1505
		30	190	515	240	630	305	780	390	1000
2400	57	0	440	895	525	1035	630	1210	765	1460
		15	255	600	310	705	380	835	470	1020
		30	115	355	150	425	190	515	245	645
2000	52	0	295	655	350	745	415	855	500	1005
		15	160	425	195	490	235	570	290	680
		30	65	235	80	280	105	335	135	405

- NOTES: 1. Increase distances 10% for each 25°F above standard temperature for particular altitude.
 2. For operation on a dry, grass runway, increase distances (both "ground run" and "total to clear 50 ft. obstacle") by 7% of the "total to clear 50 ft. obstacle" figure. 3) *TRAIL WIND EVERY 2KT INCREASE 10% (FROM 172 POH)*

MAXIMUM RATE-OF-CLIMB DATA

GROSS WEIGHT LBS.	AT SEA LEVEL & 59°F.			AT 5000 FT. & 41°F.			AT 10,000 FT. & 23°F.			AT 15,000 FT. & 5°F.			AT 20,000 FT. & -12°F.		
	IAS MPH	RATE OF CLIMB FT/MIN	GAL. OF FUEL USED	IAS MPH	RATE OF CLIMB FT/MIN	From SL FUEL USED	IAS MPH	RATE OF CLIMB FT/MIN	From SL FUEL USED	IAS MPH	RATE OF CLIMB FT/MIN	From SL FUEL USED	IAS MPH	RATE OF CLIMB FT/MIN	From SL FUEL USED
2800	88	980	1.5	86	745	3.7	84	510	6.3	82	280	10.2	80	50	20.5
2400	86	1295	1.5	84	1005	3.1	82	720	5.0	79	435	7.6	77	150	12.9
2000	84	1710	1.5	82	1350	2.7	79	995	4.1	76	640	5.9	74	280	9.2

- NOTES: 1. Flaps up, full throttle, 2600 RPM, mixture leaned for smooth operation above 5000 ft.
 2. Fuel used includes warm-up and take-off allowance.
 3. For hot weather, decrease rate of climb 30 ft./min. for each 10°F above standard day temperature for particular altitude.

LANDING DISTANCE TABLE

LANDING DISTANCE WITH 40° FLAPS ON HARD SURFACED RUNWAY

GROSS WEIGHT POUNDS	APPROACH IAS MPH	@ SEA LEVEL & 59° F		@ 2500 FEET & 50° F		@ 5000 FEET & 41° F		@ 7500 FEET & 32° F	
		GROUND ROLL	TOTAL TO CLEAR 50 FT. OBS.	GROUND ROLL	TOTAL TO CLEAR 50 FT. OBS.	GROUND ROLL	TOTAL TO CLEAR 50 FT. OBS.	GROUND ROLL	TOTAL TO CLEAR 50 FT. OBS.
2800	69	590	1350	640	1430	680	1505	740	1595

NOTE: Distances are based on zero wind, power off and heavy braking.
Reduce landing distances 10% for each 6 MPH headwind.

CRUISE PERFORMANCE

LEAN MIXTURE

Standard Conditions \ Zero Wind \ Gross Weight- 2800 Pounds

RPM	MP	% BHP	GAL/ HOUR	TAS MPH	60GAL (NO RESERVE)		79GAL (NO RESERVE)	
					ENDR. HOURS	RANGE MILES	ENDR. HOURS	RANGE MILES
2500 FEET								
2450	23	76	14.2	158	4.2	670	5.6	885
	22	72	13.4	154	4.5	690	5.9	910
	21	68	12.7	151	4.7	715	6.2	940
	20	63	12.0	148	5.0	730	6.6	965
2300	23	71	13.1	154	4.6	700	6.0	925
	22	67	12.2	149	4.9	740	6.5	970
	21	62	11.5	145	5.2	760	6.9	1005
	20	59	11.0	142	5.5	775	7.2	1020
2200	23	67	12.1	149	5.0	745	6.5	980
	22	63	11.4	146	5.3	770	6.9	1010
	21	59	10.8	142	5.6	790	7.3	1040
	20	55	10.2	138	5.9	810	7.7	1065
2000 MAXIMUM RANGE SETTINGS	20	47	8.7	120	6.9	865	9.1	1135
	19	43	8.2	121	7.3	890	9.6	1170
	18	39	7.5	113	8.0	900	10.5	1185
	17	35	7.0	105	8.6	905	11.3	1190
5000 FEET								
2450	23	78	14.5	163	4.1	670	5.4	885
	22	73	13.6	159	4.4	700	5.8	925
	21	70	13.0	156	4.6	720	6.1	950
	20	65	12.2	151	4.9	750	6.5	985
2300	23	73	13.4	158	4.5	710	5.9	930
	22	69	12.6	155	4.7	730	6.3	965
	21	64	11.9	151	5.0	760	6.6	1005
	20	60	11.2	146	5.4	785	7.1	1035
2200	23	68	12.4	155	4.8	750	6.4	985
	22	64	11.7	151	5.1	775	6.8	1020
	21	60	11.0	146	5.5	800	7.2	1050
	20	57	10.5	143	5.7	815	7.5	1075
2000 MAXIMUM RANGE SETTINGS	19	45	8.5	126	7.1	895	9.3	1175
	18	41	7.9	118	7.6	905	10.0	1190
	17	37	7.3	111	8.2	910	10.8	1200
	16	34	6.8	103	8.6	905	11.6	1190

Figure 5-4 (Sheet 1 of 3).

CRUISE PERFORMANCE

LEAN MIXTURE

Standard Conditions \ Zero Wind \ Gross Weight- 2800 Pounds


RPM	MP	% BHP	GAL/ HOUR	TAS MPH	60GAL (NO RESERVE)		79GAL (NO RESERVE)	
					ENDR. HOURS	RANGE MILES	ENDR. HOURS	RANGE MILES
7500 FEET								
2450	21	71	13.1	161	4.6	730	6.0	960
	20	67	12.4	157	4.8	760	6.4	1005
	19	62	11.7	152	5.1	780	6.8	1025
	18	58	11.0	147	5.5	805	7.2	1055
2300	21	66	12.2	156	4.9	760	6.5	1005
	20	62	11.6	151	5.2	780	6.8	1025
	19	58	11.0	147	5.5	800	7.2	1050
	18	54	10.5	142	5.7	810	7.5	1065
2200	21	62	11.4	152	5.3	805	6.9	1055
	20	58	10.7	148	5.6	830	7.4	1090
	19	54	10.2	143	5.9	840	7.7	1105
	18	51	9.7	138	6.2	860	8.1	1130
2000 MAXIMUM RANGE SETTINGS	19	47	8.7	131	6.9	900	9.1	1185
	18	43	8.1	123	7.4	910	9.8	1200
	17	39	7.6	116	7.9	930	10.4	1210
	16	36	7.0	107	8.6	920	11.3	1210
10,000 FEET								
2450	19	63	11.9	156	5.0	785	6.6	1035
	18	60	11.2	152	5.3	810	7.1	1065
	17	55	10.6	146	5.7	830	7.5	1090
	16	51	10.0	141	6.0	840	7.9	1105
2300	19	60	11.1	152	5.4	820	7.1	1080
	18	56	10.5	147	5.7	840	7.5	1105
	17	51	9.8	141	6.1	860	8.1	1130
	16	47	9.2	134	6.5	870	8.6	1145
2200	19	56	10.4	148	5.7	850	7.6	1120
	18	52	9.8	142	6.1	875	8.1	1155
	17	49	9.3	136	6.5	880	8.5	1160
	16	45	8.7	129	6.9	895	9.1	1175
2000 MAXIMUM RANGE SETTINGS	18	44	8.4	128	7.1	910	9.4	1200
	17	40	7.8	120	7.7	925	10.1	1215
	16	38	7.4	114	8.1	925	10.7	1215
	15	35	6.9	105	8.7	910	11.4	1200

Figure 5-4 (Sheet 2 of 3).

THE KOCH CHART FOR ALTITUDE AND TEMPERATURE EFFECTS

**TO FIND THE EFFECT OF ALTITUDE AND TEMPERATURE
CONNECT THE TEMPERATURE AND AIRPORT ALTITUDE
BY A STRAIGHT LINE.**

**READ THE INCREASE IN TAKE-OFF DISTANCE AND THE
DECREASE IN RATE OF CLIMB FROM STANDARD SEA
LEVEL VALUES HERE**

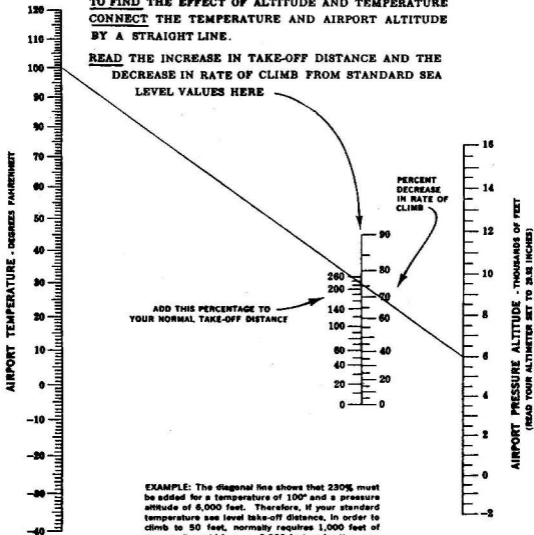


EXAMPLE: The diagonal line shows that 230% must be added for a temperature of 100° and a pressure altitude of 6,000 feet. Therefore, if your standard temperature sea level take-off distance, in order to climb to 50 feet, normally requires 1,000 feet of runway, it would become 3,300 feet under the conditions shown. In addition, the rate of climb would be decreased 76%. Also, if your normal sea level rate of climb is 500 feet per minute, it would become 120 feet per minute.

This chart indicates typical representative values for "personal" airplanes. For exact values consult your airplane flight manual.

The chart may be conservative for airplanes with supercharged engines.

Also remember that long grass, sand, mud or deep snow can easily double your take-off distance.

DENSITY ALTITUDE CHART

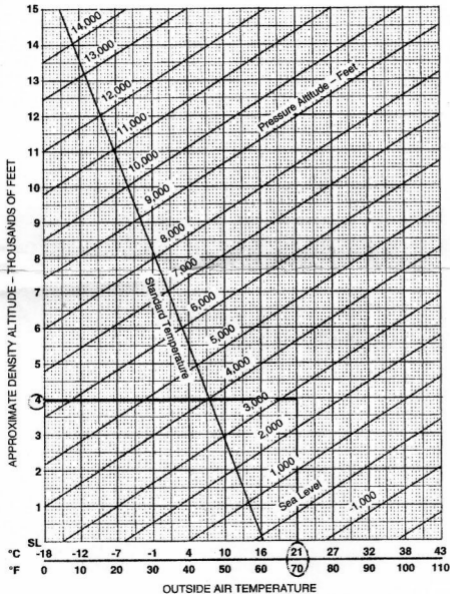


Altimeter Setting (°Hg)	Pressure Altitude Conversion Factor
28.0	1,824
28.1	1,727
28.2	1,630
28.3	1,533
28.4	1,436
28.5	1,340
28.6	1,244
28.7	1,148
28.8	1,053
28.9	957
29.0	863
29.1	768
29.2	673
29.3	579
29.4	485
29.5	392
29.6	298
29.7	205
29.8	112
29.9	20
29.92	0
30.0	-73
30.1	-165
30.2	-257
30.3	-348
30.4	-440
30.5	-531
30.6	-622
30.7	-712
30.8	-803
30.9	-893
31.0	-983

GRAHAM

20 RFL

11	04	05
AE	A/D	RSH

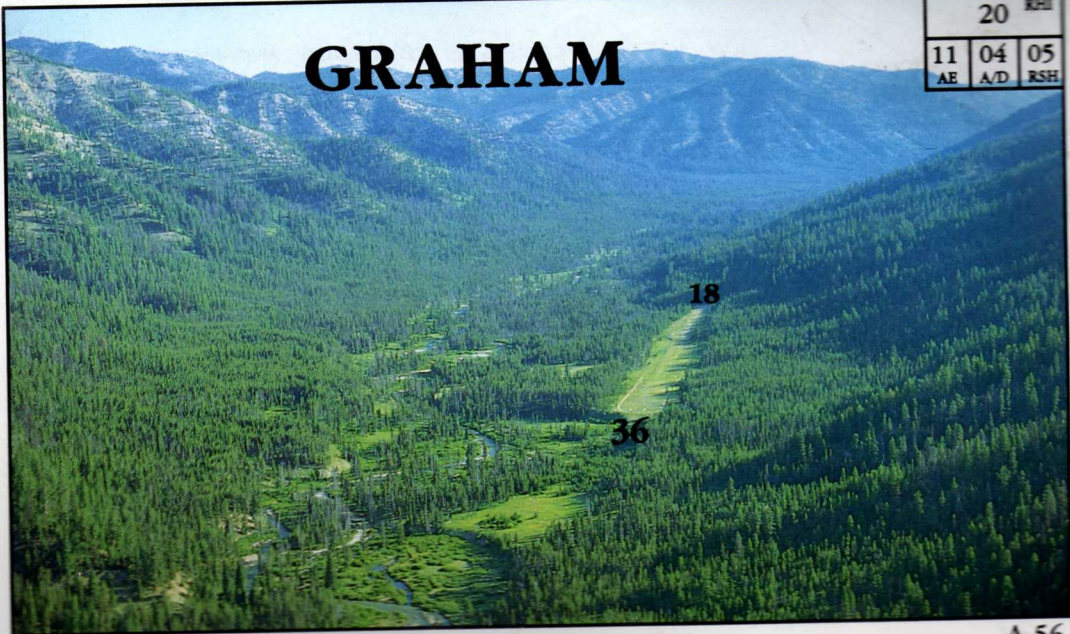

A-56

GRAHAM



U45

A-57

CTAF: 122.9
FSS: 122.6

Lat: N43-57.31
Long: W115-16.36

Class: USFS REC
Chart: Salt Lake

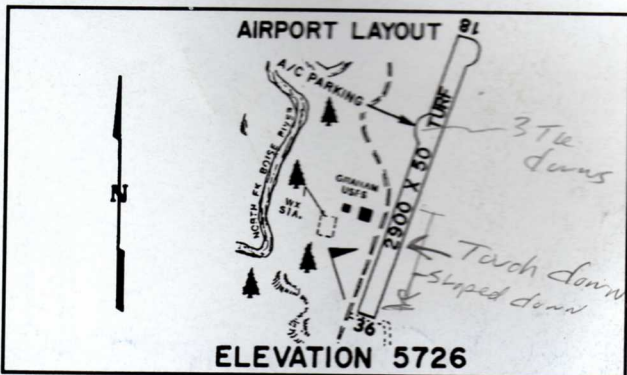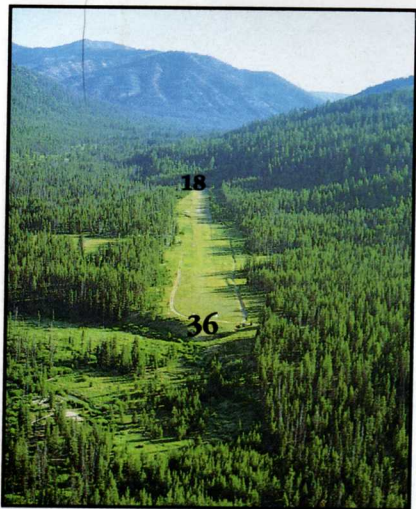

AIRPORT CAUTION • The IAFD recommends "landing RWY 36; depart RWY 18 when wind conditions allow. No line of sight between RWY ends. First 500' of RWY 36 is rough. • Close flight plan prior to landing. • No winter maintenance."
• Info: (208)373-4100 Boise Forest Air Officer.

SULPHUR CREEK

	15	RHI
08	04	03
AE	A/D	RSH



A-126



SULPHUR CREEK RANCH (W) NO ID

A-127

CTAF: 122.9
FSS: 122.6

Lat: N44-32
Long: W115-21

Class: Private
Chart: Great Falls

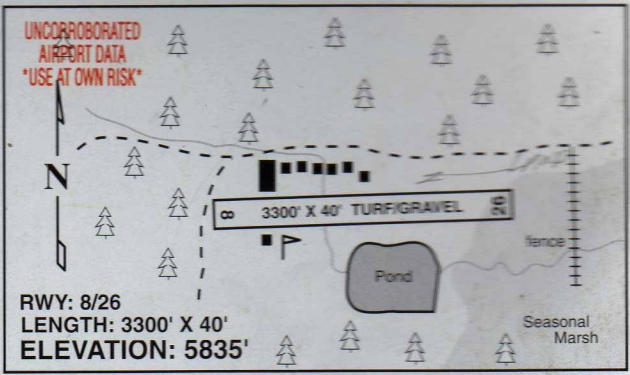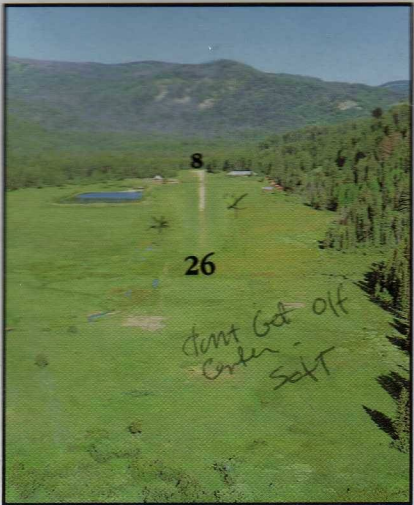

RWY: 8/26
LENGTH: 3300' X 40'
ELEVATION: 5835'

AIRPORT CAUTION • The IAFD recommends "land RWY 26 (upstream) take off RWY 8 (downstream); one way strip."
• Information: (208)377-1188.